




Electric Pallet Truck CBE Series



Heavy Duty Design , AC drive motor is available

- Maneuver loads up ramps and dock boards Effortlessly.
- Compact design combines with new technology, Making this pallet truck ideal for narrow, cramped aisles. Shortest head length in the market permits the best possible maneuverability.
- Smooth stepless speed control made in Europe.
- Power unit and drive wheel made in Europe.
- Powerful traction battery.
- 3-phase AC drive motor is available (such as CBE-2.0-AC).
- Drive wheel installed with reliable disk style braking has strong power and steady capability.
- Can be equipped with stand-on platform or side armrest.
- Electric control system reacts quickly and operates easily.
- Conforms to EN 1726 and EN 1175-1.

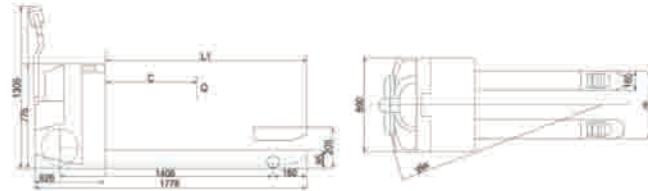

Model HA240 handle (without key) is option



Model HA220 handle (standard) is option

Model HA230 handle (Germany REMA) is option



1KG=2.2LB 1INCH=25.4MM

Model		CBE2.0-AC	CBE2.0-DC	CBE-2.5-DC	CBE2.0-S
Platform		with/without			without
Armrest		with/without			without
Capacity	Q kg	2000	2000	2000	2000
Load Center	C mm	600	600	600	600
Max.Fork Height	H mm	205	205	205	205
Lowered Fork Height	h mm	85	85	75	75
Fork Length	L1 mm	1150	1150 or 1220		1150 or 1220
Overall Fork Width	M mm	530/680	550/680	550/680	530/680
Travelling Speed (With/Without Load)	km/h	5.68/6.44	3.6/5.4		3.6/5.4
Lifting Speed (With/Without Load)	mm/s	24/30	24/30		21.8/30
Lowering Speed (With/Without Load)	mm/s	15/45	15/45		50/53
Drive unit, Polyurethane	kw	1.5 (AC)	1.2		1.2
Power unit (lifting motor)		800/24	800W/24		800W/24
Front Wheel	mm	Ø80x70 (tandem) or Ø80x100 (single)			Ø80x70(tandem) or Ø70x100 (single)
Rear drive wheel	mm	Ø250x80			Ø250x80
Traction Battery	V/Ah	24V/210Ah, 185kg			24V/210Ah, 181.5kg
Charger	V/A	24/25			24/25
Overall FDimension LxWxH	mm	1776x690x1305			1840x690x1300
Net Weight	kg	324	324	338	325

Electric Pallet Truck CBE-Z Series

Heavy Duty Design, we are the only one suppliers of Max.10t electric pallet truck in China

- Can be widely used in distribution centers, factories, supermarkets, warehouses and freight terminals.
- Compact design combines with new technology, safe, fast and easy operation.
- Electric/hydraulic system offers a clean, noise free environment.
- Variable speed controller for maximum efficiency, Power unit and drive wheel made in Europe.
- Equipped with an electromagnetic type fail-safe braking system.
- Can be with stand-on platform and armrest.



With protection bar and stand on platform. Special design for moving drum. 3Ton heavy duty walkie pallet truck. 6Ton heavy duty pallet truck. 10Ton heavy duty power truck.

1KG=2.2LB 1INCH=25.4MM

Model		CBE1.5Z	CBE2.0Z	CBE2.5Z	CBE3.0Z	CBE6.0Z
Load Capacity *1	Q kg/lbs	1500/3300	2000/4400	2500/5500	3000/6600	6000/13200
Max. Fork Height	mm/inch	200/7.9"	200/7.9"	200/7.9"	205/8.1"	205/8.1"
Lowered Fork Height	B mm/inch	90/3.5"	90/3.5"	90/3.5"	85/3.3"	85/3.3"
Overall Length	L mm/inch	1530/60"	1800/71"	1800/71"	2050/80.7"	2069/81.5"
Overall Width	W mm/inch	600/23.6"	780/30.7"	780/30.7"	780/30.7"	780/30.7"
Overall Height	H mm/inch	1350/53"	1480/58.2"	1480/58.2"	1480/58.2"	1480/58.2"
Fork Length *2	C mm/inch	1150/45.3"	1150/45.3"	1150/45.3"	1150/45.3"	1150/45.3"
Fork Width *3	D mm/inch	550/21.6"	550/21.6"	550/21.6"	550/21.6"	550/21.6"
Turning Radius	R mm/inch	1450/57"	1530/60"	1530/60"	1450/57"	1480/58.2"
Travel Speed	Without Load	km/hr	5.7	5.4	5.4	5
	With Load	km/hr	4.2	3.6	3.6	4.5
Motor	Drive Motor	kw	12V 0.75	24V 1.2	24V 1.2	24V 1.2
	Hydraulic Lift Motor	kw	0.8	1.2	1.2	1.5
Battery	Ah/Hr	24V 150	24V 210	24V 210	24V 210	24V 210
Battery Charger	A/V	20/24	25/24	25/24	25/24	25/24
Weight (incl. Battery)	kg/lbs	310/680	450/990	460/1012	620/1364	810/1782

1, *1,*2 and *3 mean other capacity, fork length and fork width can be made on request.
2, The specification sheet according to VDI regulation 2198 only provides technical values for the standard truck.