



### Electric Table Truck *CYTD & CYTE Series*

- Our electric table truck which are long lasting and deliver trouble free performance. Offering qualitative performance with no maintenance, these are perfect for various industrial applications.
- All welded steel frame, durable and reliable.
- Motor or foot pump is available.
- Deal for portable work station.
- Integrated power pack, heavy-duty cylinder with velocity fuse and pressure compensated down speed control valve.
- Special sizes are available upon request.



Model		CYTD300	CYTD500	CYTD1000H	CYTD350S	CYTD1000SH	CYTE150	CYTE250
Load Capacity	kg	300	500	1000	350	1000	150	250
Min. Height	mm	288	315	380	405	500	210	280
Max. Height	mm	900	900	1000	1320	1700	740	900
Table Size	mm	815x500x50	820x500x50	1200x610x50	910x500x56	1200x610x60	700x450x50	820x500x50
Handle Height	mm	1085	1085	1600	1101.5	1101.5	1085	1090
Lifting Speed	S	≤10	≤16	≤9	≤15	≤18	≤18	≤18
Lowering Speed	S	≤10	≤15	≤15	≤15	≤20	≤20	≤20
Motor	W	800	800	800	800	800	/	/
Battery	V/Ah	24/33	24/33	24/33	24/33	24/33	/	/
Battery Charger	V/A	24/5	24/5	24/5	24/5	24/5	/	/
Weight	kg	122	132	250	150	334	42	94
Packing Size	mm	1170x530x740	1170x530x740	1600x620x840	1250x530x740	1600x620x840	820x460x280	900x520x380
Remark		*S=with double scissors *H=with heavy duty load table						

1KG=2.2LB 1INCH=25.4MM

### Post Lift Table *PT & PTS Series*

- Built for fast and efficient lifting, transporting and positioning of equipment and materials.
- Long lasting hydraulic pump is foot operated, providing flexibility and portability.
- Foot-operated hydraulic lift tables for heavy duty shop.
- Auto two speed manual hydraulic foot pump for maximum operation comfort and producing.
- DC electric motor to automatically raise and lower the platform is available.
- All models includes: casters, two rigid and tow swivel with wheel brakes.




Model		PT02-1616	PT05-1818	PT10-2036	PT20-2436	PT20-3036	PT20-3242
Load Capacity	kg	100	250	500	1000	1000	1000
Lowest Height(mm)	mm	790	790	915	915	915	915
Max.Height(mm)	mm	1245	1245	1372	1372	1372	1372
Table.Dimensions(mm)	mm	406x406	458x458	508x915	610x915	762x915	812x1220
Net Weitht(kg)	kg	29	44	83	127	142	185
Packing Dimensions(mm)	mm	490x420x800	540x470x800	930x520x920	930x630x920	930x780x920	1240x830x920
Qty/1x20" FCL	pcs	110	96	44	36	28	22

1KG=2.2LB 1INCH=25.4MM



Model		PTS20-2436	PTS20-3042	PT12-10/PT18-10	PT12-20/PT18-20	PT12-40/PT18-40
Load Capacity	kg/lbs	100kg 2200lb	100kg 2200lb	455kg 1000lb	910kg 2200lb	1820kg 4000lb
Lowest Height(mm)	mm	540	670	635/787	635/787	635/787
Max.Height(mm)	mm	1250	1500	940/1245	940/1245	940/1245
Table.Dimensions(mm)	mm	610x915	762x915	508x762	610x915	610x915
Net Weitht(kg)	kg	145	175	72/78	96/101	116
Packing Dimensions(mm)	mm	930x780x550	930x780x680	810x520x800	980x630x800	980x630x800
Qty/1x20" FCL	pcs	36	28	87/58	54/36	54/36

1KG=2.2LB 1INCH=25.4MM

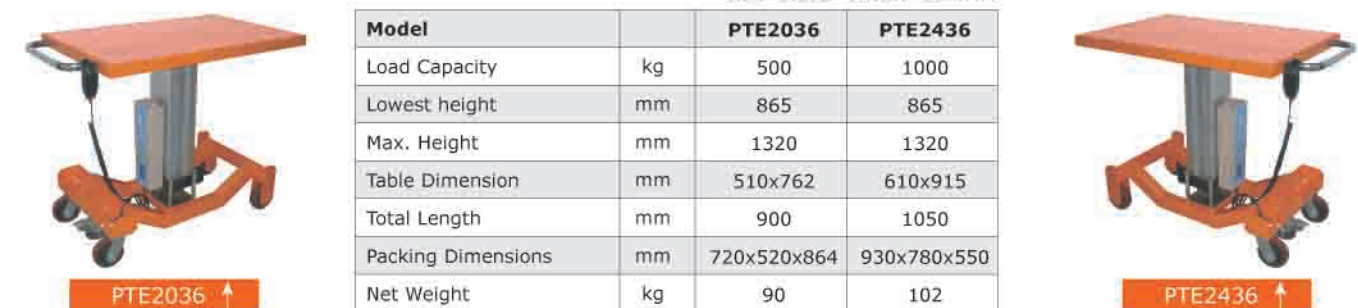

Model		PTE2036	PTE2436
Load Capacity	kg	500	1000
Lowest height	mm	865	865
Max. Height	mm	1320	1320
Table Dimension	mm	510x762	610x915
Total Length	mm	900	1050
Packing Dimensions	mm	720x520x864	930x780x550
Net Weight	kg	90	102

1KG=2.2LB 1INCH=25.4MM